


SY series energy storage batteries





Introduce


TCSN SY series are designed for wall mounted solutions. For narrow space in Vehicles, Garage, moveable house, SY series provide, 25.6V and 51.2V storage system communicated with major inverter brands. Prismatic cells adopted for all SY slim mounted line.


Features

 **Reliable and long-lasting**
 Cycle life: 8000 times (0.5C 80% DOD)
 Design life: 20 years

 **Safe and worry-free**
 Using LFP batteries ensures high safety, no fire, and no explosion.

 **Flexible parallel connection**
 Maximum support for 15 units to be used in parallel

 **Multiple protection**
 Various protective measures such as overvoltage, overcurrent, overheating and short circuit protection


 **Man-machine interaction**
 LCD Push-button screen

Performance

Model	SY51.2-314
Performance	
Cell	Square LFP 314Ah
Terminal	M8
IP Grade	IP21
Self Discharge	<=2%/Month
Cycle Life	8000times(0.5C 80%DOD)
Rec. Charge Current	150A
Max. Charge Current	300A
Rec. Charge Voltage	54.4~55.2V
Charge Cut-off Voltage	58.4V
Balancing Voltage	>54.4V
Rec. Discharge Current	150A
Max. Discharge Current	300A
Rec. Discharge Cut-off Voltage	44.8V
Min. Discharge Cut-off Voltage	>40V
Short Circuit Current	Approx.500A

Performance parameters	
Capacity	314Ah(0.5C@25°C)
Nominal Voltage	51.2 V
Energy	16076.8Wh
Weight	124kg
Dimensions	442*860*240mm
Communication interface	RS485/CAN
LCD Panel	Push-button screen
Storage Temp	-5°C to 35°C
Discharge Temp	-20°C to 55°C
Charge Temp	0°C to 45°C




Size

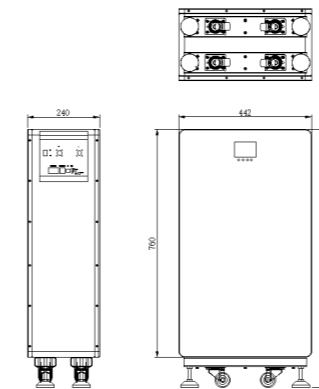

Compliance

Certifications	Cell UN38.3
	Battery UN38.3
Transport Appraisal	UN3480,CLASS 9

System Management Diagram

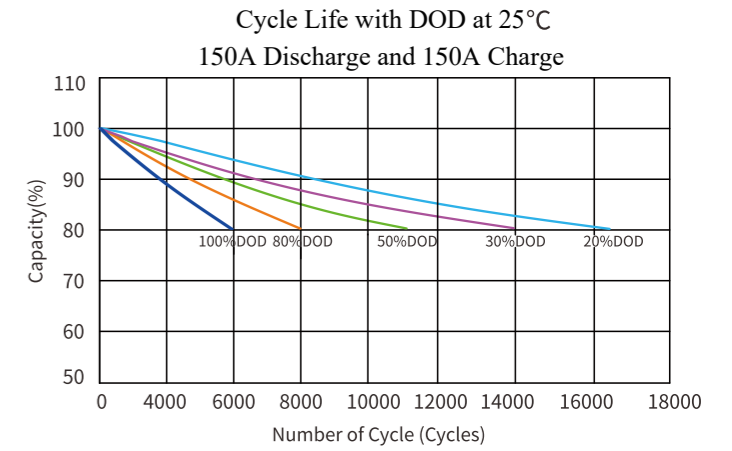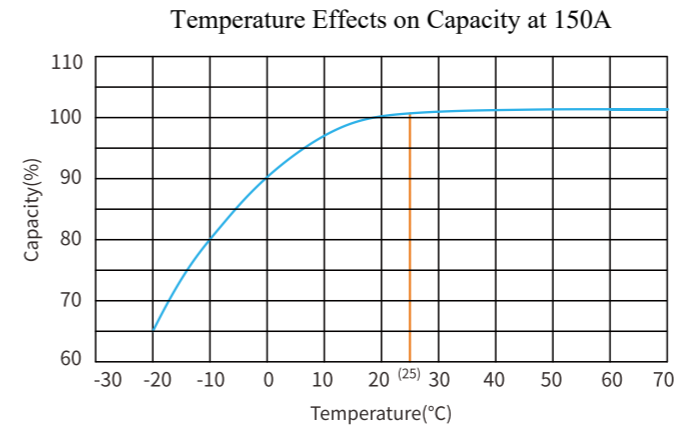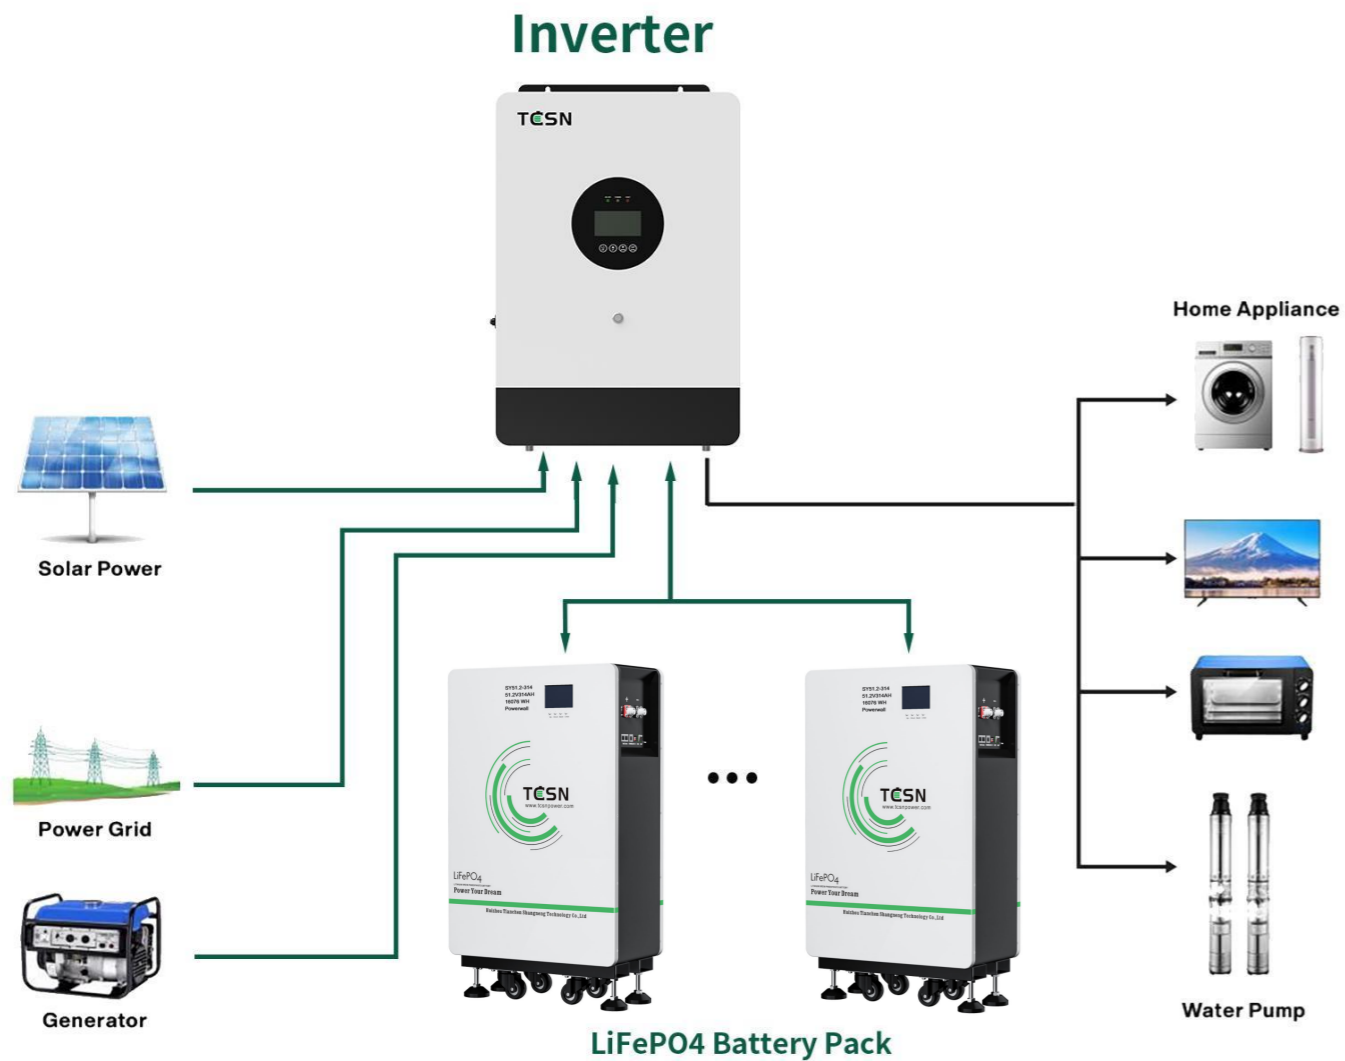

Cautions

1. Do NOT short circuit, crush or disassemble.
2. Do NOT heat or incinerate.
3. Do NOT immerse in any liquid.
4. Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.
5. Disconnect charging source prior to connecting or disconnecting battery terminals.
6. Do not dispose of batteries in a fire as they can explode.
7. Do not open, alter, or mutilate batteries. Released electrolyte is harmful to skin and eyes. It may be toxic.
8. Do not mix different types and brands of lithium-ion batteries.
9. Do not dispose in trash, follow local regulations and manufacturer's instruction.
10. See installation instructions before connecting to the supply.
11. The battery cabinet receives power from more than one source. Disconnection of all DC sources is required to De-energize this unit before installing or servicing. Wait 5 minutes before opening the unit.
12. Do not install on or over combustible surfaces.
13. Refer to manual before servicing.
14. Do not touch bare terminals.

Characteristics Curve

