

FLseries energy power batteries



Introduce

TCSN FL series utilizes high-rate, long-life LFP batteries and features a built-in, high-quality BMS. Compared to traditional lead-acid batteries, these lithium batteries demonstrate exceptional performance and longevity, while also offering superior charging capabilities; they are widely applicable across a variety of scenarios, such as low-speed electric vehicles and sightseeing shuttles.

Features

Shock-resistant design
Automotive-Grade Vibration-Resistant Design
Unafraid of Bumps — Rock-Solid Stability

Safe and worry-free
Using LFP batteries ensures high safety, no fire, and no explosion.

Worry-Free After-Sales Service
5-Year Standard Warranty
Long-Lasting Protection — Extendable

Low self-discharge
Significantly Reduced Power Loss During Hibernation
Monthly Self-Discharge $\leq 2\%$

Intelligent Management
Remote Backend Monitoring
Data Management


Environmentally Friendly
Practicing the Circular Economy
Enabling Clean Operations

Performance

Model	Dubhe FL80-205
Performance	
Cell	Square LFP 205Ah
Terminal	M8
IP Grade	IP65
Self Discharge	$\leq 2\%$ /Month
Cycle Life	6000times(80%DOD)
Rated Charge Current	100A
Max. Charge Current	150A
Rated Charge Voltage	85~86.25V
Charge Cut-off Voltage	91.25V
Balancing Voltage	$>85V$
Rated Discharge Current	200A
Max. Discharge Current	400A10S
Rated Discharge Cut-off Voltage	70V
Min. Discharge Cut-off Voltage	$>62.5V$
Short Circuit Current	Approx.3000A

Performance parameters	
Capacity	205Ah(0.5C@25°C)
Nominal Voltage	80V
Energy	16400Wh
Weight	~150kg
Dimensions	731*510*326mm
Communication interface	RS485/CAN/Bluetooth
LCD Panel	4.2-inch touch screen
Storage Temp	-5°C to 35°C
Discharge Temp	-20°C to 55°C
Charge Temp	0°C to 45°C

Size

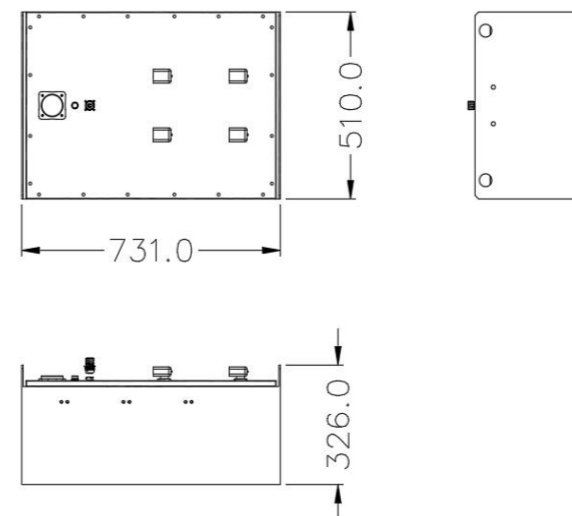


Compliance

Certifications	Cell UN38.3
	Battery UN38.3
Transport Appraisal	UN3480,CLASS 9


System Management Diagram





Temperature Effects on Capacity at 75A

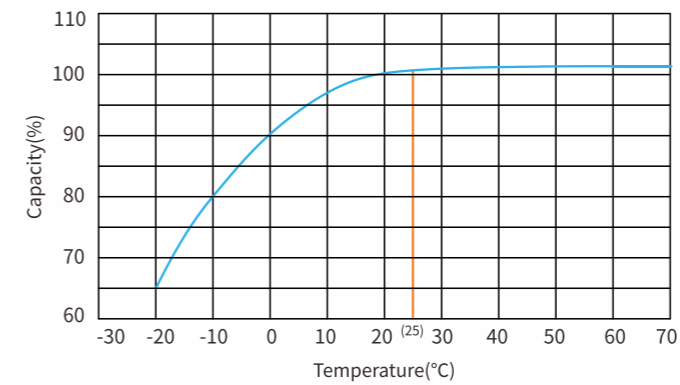

Cycle Life with DOD at 25°C
150A Discharge and 150A Charge

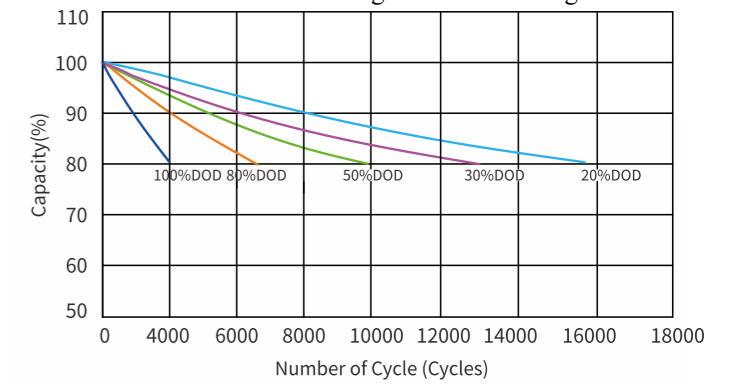

Characteristics Curve

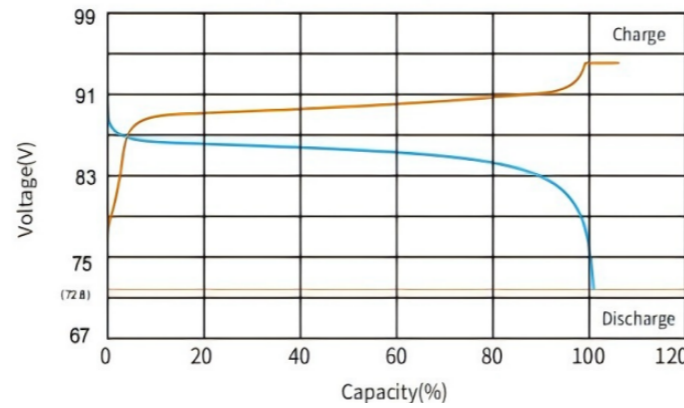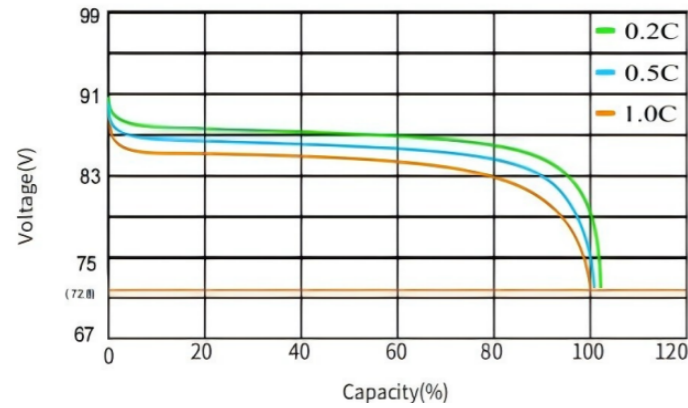

Cautions

1. Do NOT short circuit, crush or disassemble.
2. Do NOT heat or incinerate.
3. Do NOT immerse in any liquid.
4. Store at 50% capacity. Recharge every 3 months. The storage area should be clean, cool, dry and ventilated.
5. Disconnect charging source prior to connecting or disconnecting battery terminals.
6. Do not dispose of batteries in a fire as they can explode.
7. Do not open, alter, or mutilate batteries. Released electrolyte is harmful to skin and eyes. It may be toxic.
8. Do not mix different types and brands of lithium-ion batteries.
9. Do not dispose in trash, follow local regulations and manufacturer's instruction.
10. See installation instructions before connecting to the supply.
11. The battery cabinet receives power from more than one source. Disconnection of all DC sources is required to De-energize this unit before installing or servicing. Wait 5 minutes before opening the unit.
12. Do not install on or over combustible surfaces.
13. Refer to manual before servicing.
14. Do not touch bare terminals.